

# BLADE™ 750

## Master Stream Nozzle



### Overview

The BLADE™ 750 delivers unmatched versatility and control, combining large droplet formation with variable velocity for superior stream stability, reach, and penetration. Its adjustable BLADE™ stream width and vertical-to-horizontal positioning allow for precise suppression in any fireground scenario. The BLADE™ 750 is engineered for maximum performance on any structure fire—from residential to high-rise.

### Features

- Solid tight pattern with large water droplets
- Solid linear BLADE™ for maximum coverage
- Hard-coat anodized aluminum construction
- Available with 2.5" NH and 2.5" NPSH
- NFPA 1960/1964 compliant
- 5-Year Warranty


### Specifications

|                 | IMPERIAL | METRIC   |
|-----------------|----------|----------|
| Target Flow     | 750 gpm  | 2893 lpm |
| Target Pressure | 100 psi  | 7 bar    |
| Weight          | 7 lbs    | 3.2 kg   |
| Length          | 9.5 in.  | 241.3 mm |
| Width           | 8 in.    | 203.2 mm |
| Height          | 3.7 in.  | 93.98 mm |

### Flow Rates

| PRESSURE PSI (BAR) | FLOW RATE GPM (LPM) |
|--------------------|---------------------|
| 50 (3.4)           | 530 (2006)          |
| 75 (5.2)           | 650 (2461)          |
| 100 (6.9)          | 750 (2839)          |
| 125 (8.6)          | 839 (3176)          |
| 150 (10.3)         | 919 (3479)          |

### Coverage

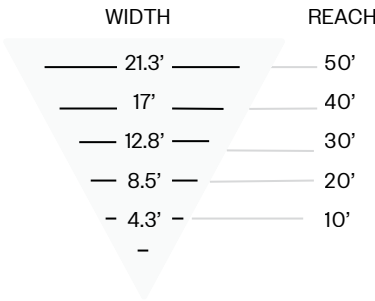

**NFPA  
COMPLIANT**